

PVC-Coated SpeedCouple

for use with PVC-Coated Rigid Conduit or Elbows

Description & Application

PVC-Coated SpeedCouple is used to quickly and easily install PVC-coated rigid conduit and elbows. Rated for direct burial and ideal for tight space applications, PVC-Coated SpeedCouple allows you to complete connections without having to turn the conduit or elbows.



Features

- Trade sizes 2" through 6"
- 40 mil gray PVC exterior coating, urethane interior coating
- Sealing Sleeves on both ends
- Stainless Steel Locking Screw
- Lead-in threads facilitate threading & ground continuity
- Concrete tight
- Suitable for direct burial

Materials & Finishes


Material: Steel Coupling, Stainless Steel Locking Screw
 Exterior Finish: A nominal .040 inch (40 mil) gray PVC Coating

Technical/Specification Documents

Specification Guide (1995 Master)	Available on Website
Specification Guide (2004 Master)	Available on Website
Installer Certification and Tools	Available on Website
Chemical Resistance Charts	Available on Website
Performance Specifications	Available on Website

Standards

- UL514B
- CSA C22.2 No. 18.3-12
- File Number - E200413

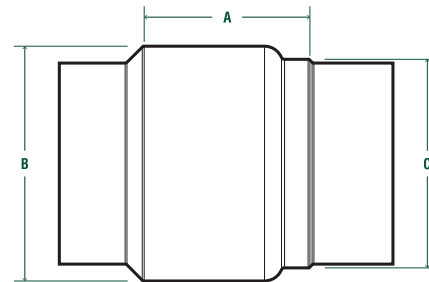

Dimensions

COUPLING SIZE	A	B	C
2"	2.459	2.955	2.64
2-1/2"	3.425	3.58	3.131
3"	3.545	4.19	3.748
3-1/2"	3.665	4.83	4.25
4"	3.761	5.33	4.755
5"	4.065	6.355	5.86
6"	4.065	7.463	6.91

Ordering Information

CATALOG NUMBER	DESCRIPTION	WEIGHT PER 100 (LBS)	STANDARD PACK QUANTITY	UPC	AVAIL. CODE
SCPLG-2	2" PVC-COATED SPEEDCOUPLE	88	30	784011923281	1
SCPLG-2-1/2	2-1/2" PVC-COATED SPEEDCOUPLE	176	9	784011923298	1
SCPLG-3	3" PVC-COATED SPEEDCOUPLE	198	8	784011923304	1
SCPLG-3-1/2	3-1/2" PVC-COATED SPEEDCOUPLE	265	8	784011923311	1
SCPLG-4	4" PVC-COATED SPEEDCOUPLE	309	8	784011923328	1
SCPLG-5	5" PVC-COATED SPEEDCOUPLE	397	4	784011923335	1
SCPLG-6	6" PVC-COATED SPEEDCOUPLE	525	2	784011923342	1